


# EZ Photo Y

Self-service photo kiosk

## PRODUCT PICTURE

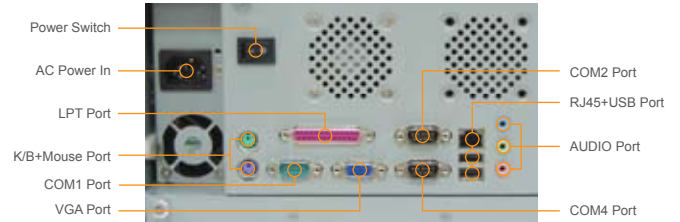

## Applications

EZ Photo Y can input photograph data with touch screen, it's easy to edit personal photo, through network for printing out photographic quality prints from mini lab or central lab.

## Key Features

- 15" TFT Touch Screen
- Tilting Angle from -5° to 90°
- Modular design, screw less design for easy maintenance
- 12-in-1 card reader, IrDA, Receipt printer

## System Specifications

### System

- CPU Intel® Pentium® 4 processor, FSB 533/400MHz
- Memory 1 x 184 pin DDR RAM socket up to 1GB, supports DDR 400/333
- Chipset Intel® 845gv + Intel® 82801 DB ICH4
- Graphics Built-In Core Logic, AGP 4X, Share with system memory (Up to 64MB)
- Network 10/100 Base-T fast Ethernet
- Audio ICH4 integrated audio with AC97 CODEC  
Built-in stereo speakers
- IrDA Built-in IrDA
- Power Supply ATX 220W, input range 100~240VAC @ 50~60Hz
- LED Power, LAN, HDD

### I/O Ports

- Serial Ports 4 x Serial (3 x RS232, 1x RS-232 / 422 / 485)
- USB 6x USB 2.0 (4 x back I/O, 2 x onboard)
- LAN 1 x RJ-45 interface
- PS/2 2 x PS/2 ports (For keyboard and mouse)
- Audio Line-in, Line-out & Mic-in
- VGA 1 x DB-15 VGA interface for dual display
- Parallel Port 1 x Parallel (SPP/EPP/ECP)

### Physical Dimensions

- Weight 16 Kg
- Dimension 337(W) x 288 (D) x 478 (H) mm

### Environment

- EMC & Safety CE, FCC
- Temperature Operating: 0 ~ 40°C  
Storage: -20 ~ 60°C

### Optional Items

- CPU Intel P4 2.8 (FSB 533), Intel Celeron 2.0/2.5 (FSB 400)
- Memory DDR 256MB, 512MB, 1GB (DDR 400, 184Pin)
- HDD 40 GB, 80GB (IDE, 7200RPM)
- OS Windows 2000/XP

### Touch Display

- LCD 15" TFT
- Max. Resolution 1024 x 768
- Brightness 250 cd/m²
- Touch Screen 5-wire Resistive

### Storage

- HDD 1 x 3.5" IDE Hard Disk drive
- DVD-ROM 1 x 3.5" IDE DVD-ROM Disk drive
- Memory Card Reader 12-In-1 Card Reader (XD, SM, Microdrive, MS, MS-Pro, MS-P Duo, MMC, RS-MMC, SD, MiniSD built in)
- Receipt Printer 30Directly Thermal Printer with Auto Cutter Thermal

